


5MP MOTORIZED VANDAL DOME CAMERA



ENC-HVD8M-40R-69

FEATURES

2.7 ~ 13.5 mm Motorized Lens
Smart IR up to 40 m (Upgradable to 50 m)
ONVIF Profile (S, G, T)
Quad Stream
Audio and Alarm Support
PoE, IP67, IK10

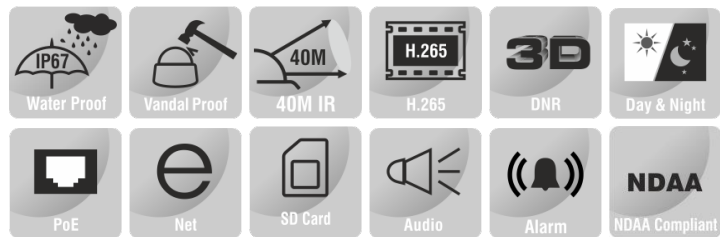

SPECIFICATION

MODEL	Model No.	ENC-HVD8M-40R-69
	Type	5MP MOTORIZED VANDAL DOME CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 5.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	Motorized
	Focal Length	2.7 ~ 13.5 mm Lens
	Digital Zoom	16x
	Focus	Auto / Manual
	Iris	Fixed Auto Iris
	Angle of View (H)	93.8° ~ 26.9°
	Angle of View (V)	68.3° ~ 20.1°
	Angle of View (D)	116.0° ~ 33.5°
	Angle Adjustment	Bracket; Pan 0~355°, Tilt 0~75°, Rotate 0~355°
	Aperture	F1.6
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
	S/N Ratio	≥55 dB
	Defog	Smart Defog
	WDR	120 dB
	Smart IR	Up to 40 m (Upgradable to 50 m)
	Wavelength	850 nm

5MP MOTORIZED VANDAL DOME CAMERA



ENC-HVD8M-40R-69


MODEL	Model No.	ENC-HVD8M-40R-69
	Type	5MP MOTORIZED VANDAL DOME CAMERA
DORI	Lens	2.7 ~ 13.5 mm
	Detection	72 ~ 216 m
	Observation	28.8 ~ 86.4 m
	Recognition	14.4 ~ 43.2 m
	Identification	7.2 ~ 21.6 m
VIDEO	Max. Resolution	2592x1944
	Video Compression	Enhanced (H.265,H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (2592x1944, 2592x1520, 1920x1080, 1280x720, 704x576) @ 25/30fps Second Stream: (1920x1080, 1280x720, 704x576) @ 15fps Third Stream: (640x480, 352x288, 320x240, 176x144) @ 15fps Fourth Stream: (640x480, 352x288, 320x240, 176x144) @ 15fps (Optional)
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/Night, Tungsten, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
AUDIO	Audio Compression	G.711U, G.711A, RAW_PCM
	Audio Bit Rate	64 kbps, 128 kbps
	Audio I/O	1/1
	Built-in Mic	Supported (Optional)
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Multi Loitering, People Counting, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Face Detection , People Counting, Human & Vehicle Detection, Abnormal Video & Audio Detection, Wrong Way Detection, Illegal Parking, Tampering / Masking / Scene Change, Abnormal Speed
	Alarm Management	Motion Detection, Tampering, Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notifications	E-mail (Notification & Snapshot), HTTP (Alarm icon), FTP (Snapshot & Recording), SD Card (Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP , IGMP, 802.1X, Unicast, Multicast, QoS, ARP, SNMP, Telnet, SSL/TLS1.2
	Security	TLS Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	Edge Storage	SD card slot, up to 512 GB
	ANR	Supported
	Max. User	32
GENERAL	Client Application	EyeGuard
	Power Supply	12V DC , PoE (IEEE 802.3af)
	Max. Power Consumption	≤7.5 W
	Working Temperature	-40 °C ~ 65 °C
	Working Humidity	≤95% RH
	Ingress Protection	IP67
	Vandal Resistant	IK10
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	Φ130 × 113.3 mm
	Net Weight	0.8 kg

5MP MOTORIZED VANDAL DOME CAMERA



ENC-HVD8M-40R-69

Dimension Unit : mm

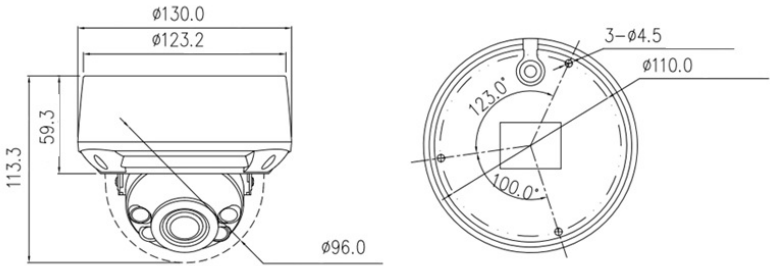

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HVD8M-40R-69	5MP H.265 IR IP Vandal Proof Dome Camera with 2.7 to 13.5mm Motorized Lens, WDR, PoE, SD Card Slot, Smart Analytics, Built-in Mic (Optional) and 40m (Upgradable to 50m) IR Support	1
ENB-BCDJ67	Junction Box for Norden Dome Camera	1
ENB-BCDQ66	Pendent Cap for Norden Dome Camera	1
ENB-BCDP66	Pendant Mount for Norden Dome Camera	1
ENB-BCDW66	Wall Mount for Norden Dome Camera	1
ENB-BCDV66	Pole Mount for Norden Dome Camera	1
ENB-BCDH66	Corner Mount for Norden Dome Camera	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HVD8M-40R-69	Carton Box	-	-

★Product specification and availability are subject to change without notice.